



HYDAC INTERNATIONAL

Electronic Area / 電子領域


HPT 500 Differential Pressure Transmitter

壓差傳感器



- Condition monitoring of filter pressure drop

- Cost effective differential pressure transmitter
- Measuring principle – Hall-sensor position detection of a pre-loaded piston
- Output signal:
 - 0,5 .. 4,5V @5V ratiometric
 - 4 .. 20mA 3 core
 - 0 .. 10V
- Electrical connection:
 - M12* 1, 4 pole
 - Deutsch DT04, 3 pole
- Mechanical connection:
 - G1/2 HN 28-22

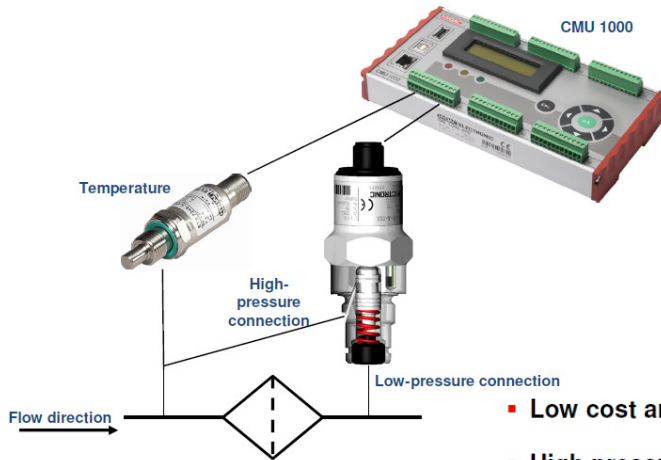

- Low cost analogue differential pressure measurement
- High pressure resistance
- Suitable for oil and water applications

