

Accessories Area / 配件領域

Double Ball Valve with two Counterbalance Valves

拖拉車輛的拉勾/掛勾高度調整，採用油壓雙抗衡閥之球閥，輕而易舉。

DESCRIPTION

Towing vehicles or tractors usually have different coupling heights. Accordingly, the drawbar of the equipment to be attached must be adjusted in height. Mechanically this can be very exhausting! The solution of this problem is a hydraulic force reinforcement. With the HYDAC block, the height adjustment is now a duck soup. When the corresponding height is reached, the block is closed.

Two counterbalance valves RS08 prevent the drawbar from dropping.


PRODUCT ADVANTAGES

- Compact
- Easy to handle
- Visible switching position
- Fully functional
- Mounting holes for direct mounting

HYDAC Acces-
sories



KHB-12LR-1112-14X-A-SO1288

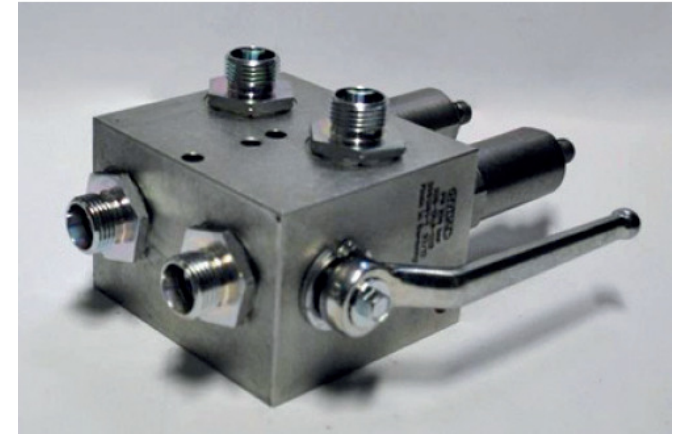

Application

