



HYDAC INTERNATIONAL


Fluid Technology Area / 流體科技領域

Compact Power Unit CO2 動力小單元CO2



Table 2 Flow rate code / max. operating pressure

Flow rate				Motor power 3~ 03 (50 Hz)									1~ 63 (50Hz)
50 Hz [l/min]	60Hz [l/min]	Pol.	Vg [ccm/U]	0,37 kW	0,55 kW	0,75 kW	1,1 kW	1,5 kW	2,2 kW	3 kW	4 kW	5,5 kW	
<u>01.3</u>	<u>01.6</u>	<u>4</u>	<u>1</u>	<u>215</u>	<u>250</u>								1,1 kW
<u>02.4</u>	02.9	4	1,9	<u>110</u>	<u>170</u>	<u>235</u>	<u>250</u>						<u>250</u>
<u>03.7</u>	04.4	4	2,8	<u>75</u>	<u>115</u>	<u>155</u>	<u>230</u>	<u>250</u>					<u>250</u>
<u>05.0</u>	06.0	4	3,8	<u>50</u>	<u>85</u>	<u>115</u>	<u>170</u>	<u>230</u>	<u>250</u>				<u>185</u>
<u>06.3</u>	07.6	4	4,7	<u>40</u>	<u>70</u>	<u>90</u>	<u>140</u>	<u>185</u>	<u>250</u>				<u>135</u>
<u>07.4</u>	08.9	2	2,8						<u>230</u>	<u>250</u>			<u>105</u>
<u>08.6</u>	10.3	4	6,5	<u>30</u>	<u>50</u>	<u>65</u>	<u>100</u>	<u>130</u>	<u>200</u>				<u>75</u>
<u>10.0</u>	12.0	2	3,8							<u>230</u>	<u>250</u>		
<u>10.2</u>	12.0	4	7,6		<u>40</u>	<u>50</u>	<u>80</u>	<u>110</u>	<u>165</u>				<u>65</u>
<u>12.6</u>	15.1	2	4,7						<u>135</u>	<u>185</u>	<u>250</u>		
<u>13.3</u>	16.0	4	10		<u>30</u>	<u>40</u>	<u>60</u>	<u>85</u>	<u>120</u>				<u>50</u>
<u>16.0</u>	19.2	4	12			<u>30</u>	<u>50</u>	<u>70</u>	<u>100</u>				<u>40</u>
<u>17.3</u>	20.7	2	6,5						<u>95</u>	<u>130</u>	<u>175</u>	<u>200</u>	
<u>20.0</u>		2	7,6						<u>80</u>	<u>110</u>	<u>150</u>	<u>200</u>	
				Operating pressure [bar] (for 50Hz and 60Hz)									

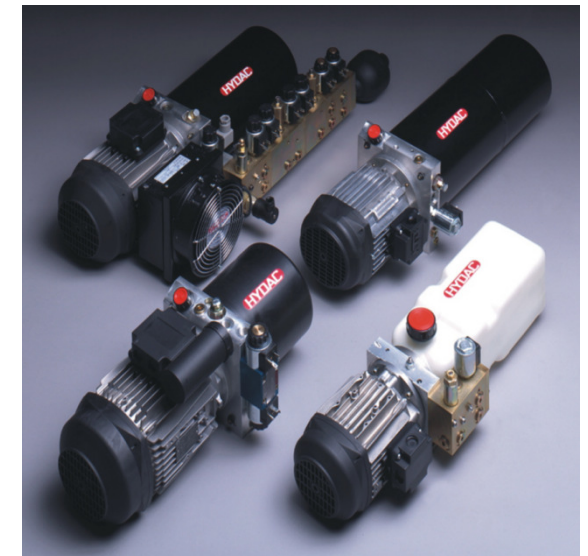

Motors with 4 poles with lower noise level

